


ATLAS OF FATIGUE CURVES

Edited by Howard E. Boyer

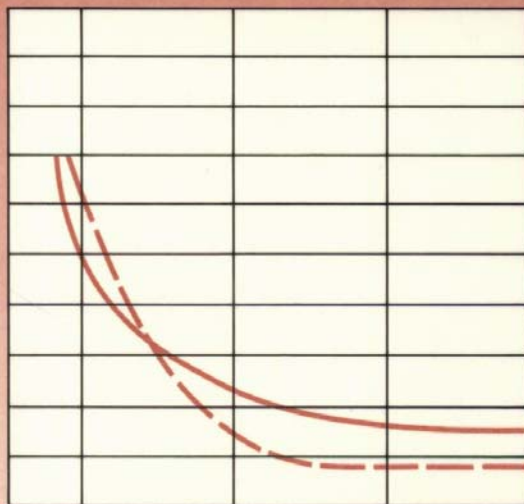

American Society for Metals

Contents

Fatigue Testing 1

- Introduction 1
- Fatigue Crack Initiation 4
- Fatigue Crack Propagation 12

SECTION 1: S-N Curves That Typify Effects of Major Variables 27

- 1-1. S-N Curves Typical for Steel 27
- 1-2. S-N Curves Typical for Medium-Strength Steels 28
- 1-3. S-N Diagrams Comparing Endurance Limit for Seven Alloys 30
- 1-4. Steel: Effect of Microstructure 31
- 1-5. Steel: Influence of Derating Factors on Fatigue Characteristics 32
- 1-6. Steel: Correction Factors for Various Surface Conditions 33
- 1-7. Fatigue Behavior: Ferrous vs Nonferrous Metals 34
- 1-8. Comparison of Fatigue Characteristics: Mild Steel vs Aluminum Alloy 35
- 1-9. Carbon Steel: Effect of Lead as an Additive 36
- 1-10. Corrosion Fatigue: General Effect on Behavior 37
- 1-11. Effect of Corrosion on Fatigue Characteristics of Several Steels 38
- 1-12. Steel: Effect of Hydrogen on Fatigue Crack Propagation 39
- 1-13. Relationship of Stress Amplitude and Cycles to Failure 40
- 1-14. Strain-Life and Stress-Life Curves 41
- 1-15. Fatigue Plot for Steel: Ultrasonic Attenuation vs Number of Cycles 42

SECTION 2: Low-Carbon Steels: Flat-Rolled, Weldments and Tubes 43

- 2-1. Typical S-N Curve for Low-Carbon Steel Under Axial Tension 43
- 2-2. AISI 1006: Effects of Biaxial Stretching and Cold Rolling 44
- 2-3. AISI 1006: Weldment; FCAW, TIG Dressed 45
- 2-4. AISI 1006: Weldment; Shear Joints 46
- 2-5. AISI 1006: Weldment; Lap-Shear Joints 47
- 2-6. AISI 1015: Effect of Cold Working 48
- 2-7. A533 Steel Plate: Fatigue Crack Growth Rate 49
- 2-8. A514F Steel Plate: Fatigue Crack Growth Rates 50
- 2-9. A514F and A633C: Variation in Fatigue Crack Growth Rate With Orientation 51
- 2-10. A514F: Scatterbands of Fatigue Crack Growth Rate 52
- 2-11. A633C Steel Plate: Scatterbands of Fatigue Crack Growth Rates 53
- 2-12. Low-Carbon Steel Weldment: Effects of Various Weld Defects 54
- 2-13. Low-Carbon Steel Weldment: Effect of Weld Reinforcement and Lack of Inclusions 55
- 2-14. Low-Carbon Steel Weldment: Effect of Weld Reinforcement and Lack of Penetration 56
- 2-15. Low-Carbon Steel Weldment: Computed Fatigue Strength; Weldment Contained Lack of Fusion 57
- 2-16. Low-Carbon Steel Weldment: Effect of Reinforcement and Undercutting 58
- 2-17. Low-Carbon Steel: Transverse Butt Welds; Effect of Reinforcement 59
- 2-18. A36/E60S-3 Steel Plate: Butt Welds 60
- 2-19. A514F/E110 Steel: Bead on Plate Weldment 61
- 2-20. A36 and A514 Steel Plates: Butt Welded 62
- 2-21. A36 Plate Steel: Butt Welded 63
- 2-22. Low-Carbon Steel Tubes: Effect of Welding Technique 64
- 2-23. Low-Carbon Steel: Effect of Applied Anodic Currents in 3% NaCl 65
- 2-24. Low-Carbon Steel: Effect of pH in NaCl and NaOH 66
- 2-25. Low-Carbon Steel: Effect of Carburization and Decarburization 67

Contents

- 2-26. A514B Steel: Effect of Various Gaseous Environments on Fatigue Crack Propagation 68
2-27. Cast 1522 and 1541 Steels: Effect of Various Surface Conditions 69
2-28. Cast A216 (Grade WCC) Steel: Fatigue Crack Growth Rate 70

SECTION 3: Medium-Carbon Steels, Wrought and Cast 71

- 3-1. AISI 1030 (Cast) Compared With AISI 1020 (Wrought) 71
3-2. AISI 1035: Effect of Gas and Salt Bath Nitriding 72
3-3. AISI 1040: Cast vs Wrought 73
3-4. AISI 1045: Relationship of Hardness and Strain-Life Behavior 74
3-5. AISI 1141: Effect of Gas Nitriding 75
3-6. Medium-Carbon Steels: Interrelationship of Hardness, Strain Life and Fatigue Life 76
3-7. Medium-Carbon Steel: Effect of Fillet Radii 77
3-8. Medium-Carbon Steel: Effect of Keyway Design 78
3-9. Medium-Carbon Steel: Effect of Residual Stresses 79
3-10. Medium-Carbon Cast Steel: Effect of Changes in Residual Stress 80
3-11. Medium-Carbon Cast Steel: *S-N* Projection (Effect of Applied Stress) 81
3-12. Medium-Carbon Cast Steel: Effect of Applied Stress (Shot Blasting) 82

SECTION 4: Alloy Steels: Low- to High-Carbon, Inclusive 83

- 4-1. Medium-Carbon Alloy Steels, Five Grades: Effect of Martensite Content 83
4-2. Medium-Carbon Alloy Steels, Six Grades: Hardness vs Endurance Limit 84
4-3. Medium-Carbon Alloy Steels: Effect of Specimen Orientation 85
4-4. 4027 Steel: Carburized vs Uncarburized 86
4-5. 4120 Steel: Effect of Surface Treatment in Hydrogen Environment 87
4-6. 4120 Steel: Effect of Surface Treatment in Hydrogen Environment 88
4-7. 4120 Steel: Effect of Various Surface Treatments on Fatigue Characteristics in Air vs Hydrogen 89
4-8. 4130 Steel: Fatigue Crack Growth Rate vs Temperature in Hydrogen 90
4-9. 4135 and 4140 Steels: Cast vs Wrought 91
4-10. 4135 and 4140 Steels: Cast vs Wrought 92
4-11. 4140, 4053 and 4063 Steels: Effect of Carbon Content and Hardness 93
4-12. 4140 Steel: Effect of Direction on Fatigue Crack Propagation 94
4-13. 4140 Steel: Effect of Cathodic Polarization 95
4-14. Cast 4330 Steel: Effects of Various Surface Conditions 96
4-15. 4340 Steel: Scatter of Fatigue Limit Data 97
4-16. 4340 Steel: Strength vs Fatigue Life 98
4-17. 4340 Steel: Total Strain vs Fatigue Life 99
4-18. 4340 Steel: Stress Amplitude vs Number of Reversals 100
4-19. 4340 Steel: Effect of Periodic Overstrain 101
4-20. 4340 Steel: Estimation of Constant Life 102
4-21. 4340 Steel: Effect of Strength Level on Constant-Life Behavior 103
4-22. 4340 Steel: Notched vs Unnotched Specimens 104
4-23. 4340 Steel: Effect of Decarburization 105
4-24. 4340H Steel: Effect of Inclusion Size 106
4-25. 4340 Steel: Influence of Inclusion Size 107
4-26. 4340 Steel: Effect of Hydrogenation; Static Fatigue 108
4-27. 4340 Steel: Effect of Hydrogen 109
4-28. 4340 Steel: Effect of Nitriding 110
4-29. 4340 Steel: Effect of Nitriding and Shot Peening 111
4-30. 4340 Steel: Effect of Induction Hardening and Nitriding 112
4-31. 4340 Steel: Effect of Surface Coatings 113
4-32. 4340 Steel: Effect of Temperature on Constant-Lifetime Behavior 114
4-33. 4520H Steel: Effect of Type of Quench 115
4-34. 4520H Steel: Effect of Shot Peening 116
4-35. 4620 Steel: Effect of Nitriding 117
4-36. 4620 Steel: P/M-Forged 118
4-37. 4620 Steel: P/M-Forged at Different Levels 119

4-38.	4625 Steel: P/M vs Ingot Forms	120
4-39.	4640 Steel: P/M-Forged	121
4-40.	High-Carbon Steel (Eutectoid Carbon): Pearlite vs Spheroidite	122
4-41.	52100 EF Steel: Surface Fatigue; Effect of Finish and Additives	123
4-42.	52100 EF Steel: Surface Fatigue; Effect of Surface Finish and Speed	124
4-43.	52100 EF Steel: Surface Fatigue; Effect of Lubricant Additives	125
4-44.	52100 EF Steel: Surface Fatigue; Effect of Lubricant Viscosity, Slip Ratio and Speed	126
4-45.	52100 EF Steel: Rolling Ball Fatigue; Effect of Oil Additives	127
4-46.	52100 Steel: Carburized vs Uncarburized	128
4-47.	8620H Steel: Carburized; Results From Case and Core	129
4-48.	8620H Steel: Effect of Variation in Carburizing Treatments	130
4-49.	8620 Steel: Effect of Nitriding	131
4-50.	8622 Steel: Effect of Grinding	132
4-51.	Cast 8630 Steel: Goodman Diagram for Bending Fatigue	133
4-52.	Cast 8630 Steel: Effect of Shrinkage	134
4-53.	Cast 8630 Steel: Effect of Shrinkage on Torsion Fatigue	135
4-54.	Cast 8630 Steel: Effect of Shrinkage on Torsion Fatigue	136
4-55.	Cast 8630 Steel: Effect of Shrinkage on Plate Bending	137
4-56.	Cast 8630 vs Wrought 8640	138
4-57.	8630 and 8640 Steels: Effect of Notches on Cast and Wrought Specimens	139
4-58.	Nitralloy 135 Steel: Effect of Nitriding	140
4-59.	AMS 6475: Effects of Welding	141
4-60.	Medium-Carbon, 1Cr-Mo-V Steel Forging: Effect of Cycling Frequency	142
4-61.	EM12 Steel: Effect of Temperature on Low-Cycle Fatigue	143
4-62.	Cast 0.5Cr-Mo-V Steel: Effects of Dwell Time in Elevated-Temperature Testing	144
4-63.	Cast 0.5Cr-Mo-V Steel: Effect of Environment at 550 °C (1022 °F)	145
4-64.	Cast C-0.5Mo Steel: Effect of Temperature and Dwell Period on Cyclic Endurance at Various Strain Amplitudes	146

SECTION 5: HSLA Steels 147

5-1.	HI-FORM 50 Steel vs 1006	147
5-2.	HI-FORM 50 Steel vs 1006: Stress Response	148
5-3.	HI-FORM 50 Steel Compared With 1006, DP1 and DP2	149
5-4.	HSLA vs Mild Steel: Torsional Fatigue	150
5-5.	Proprietary HSLA Steel vs ASTM A440	151
5-6.	Comparison of HSLA Steel Grades BE, JF and KF for Plastic Strain Amplitude vs Reversals to Failure	152
5-7.	Comparison of HSLA Steel Grades BE, JF and KF for Total Strain Amplitude vs Reversals to Failure	153
5-8.	Comparison of a Dual-Phase HSLA Steel Grade With HI-FORM 50: Total Strain Amplitude vs Reversals to Failure	154
5-9.	AISI 50 XF Steel: Effects of Cold Deformation	155
5-10.	AISI 80 DF Steel: Effects of Cold Deformation	156
5-11.	Comparison of Three HSLA Steel Grades, Cb, Cb-V and Cb-V-Si: Strain Life From Constant Amplitude	157
5-12.	Comparison of Stress Responses: DP1 vs DP2 Dual-Phase HSLA Steels	158
5-13.	Dual-Phase HSLA Steel Grade: Stress Response for As-Received vs Water-Quenched	159
5-14.	Dual-Phase HSLA Steel Grade: Stress Response for As-Received vs Gas-Jet-Cooled	160
5-15.	S-N Comparison of Dual-Phase HSLA Steel Grades DP1 and DP2 With 1006	161
5-16.	Comparison of Dual-Phase HSLA Steel DP2 With HI-FORM 50	162
5-17.	Comparison of Cyclic Strain Response Curves for Cb, Cb-V and Cb-V-Si Grades of HSLA Steel	163
5-18.	Fatigue Crack Propagation Rate: Effect of Temperature for Two HSLA Steel Grades	164

Contents

- 5-19. Effect of *R*-Ratio and Test Temperature on Crack Propagation of HSLA Steel Grade 1 165
- 5-20. Effect of Test Temperature on Fatigue Crack Propagation Behavior for Two HSLA Steel Grades 166
- 5-21. Stress-Cycle Curves for Weldments of Different HSLA Steel Grades 167
- 5-22. Weldments (FCAW): SAE 980 X Steel vs 1006 168
- 5-23. Weldments (TIG): DOMEX 640 XP Steel Welded Joints vs Parent Metal 169
- 5-24. Weldments (FCAW Dressed by TIG): Fatigue Life Estimates Compared With Experimental Data for SAE 980 X Steel 170
- 5-25. SAE 980 X Steel Weldment (FCAW): Smooth Specimen vs TIG-Dressed vs As-Welded 171
- 5-26. SAE 980 X Steel Weldment (FCAW): Lap-Shear Joints 172
- 5-27. Microalloyed HSLA Steels: Properties of Fusion Welds 173
- 5-28. Microalloyed HSLA Steels: Properties of Spot Welds 174

SECTION 6: High-Strength Alloy Steels 176

- 6-1. HY-130 Steel: Effect of Notch Radii 176
- 6-2. 300 M Steel: Effect of Notch Severity on Constant-Lifetime Behavior 177
- 6-3. TRIP Steels Compared With Other High-Strength Grades 178
- 6-4. Corrosion Fatigue: Special High-Strength Sucker-Rod Material 179
- 6-5. Corrosion Fatigue Cracking of Sucker-Rod Material 180
- 6-6. Hydrogenated Steel: Effect of Baking Time on Hydrogen Concentration 181
- 6-7. Hydrogenated Steel: Effect of Notch Sharpness 182

SECTION 7: Heat-Resisting Steels 183

- 7-1. 0.5%Mo Steel: Effect of Hold Time in Air and Vacuum at Different Temperatures 183
- 7-2. DIN 14 Steel (1.5 Cr, 0.90 Mo, 0.25 V): Effect of Liquid Nitriding 184
- 7-3. 2.25Cr-1.0Mo Steel: Influence of Cyclic Strain Range on Endurance Limit in Various Environments 185
- 7-4. 2.25Cr-1.0Mo Steel: Effect of Elevated Temperature 186
- 7-5. 2.25Cr-1.0Mo Steel: Effect of Elevated Temperature and Strain Rate 187
- 7-6. 2.25Cr-1.0Mo Steel: Effect of Temperature on Fatigue Crack Growth Rate 188
- 7-7. 2.25Cr-1.0Mo Steel: Effect of Cyclic Frequency on Fatigue Crack Growth Rate 189
- 7-8. 2.25Cr-1.0Mo Steel: Fatigue Crack Growth Rates in Air and Hydrogen 190
- 7-9. 2.25Cr-1.0Mo Steel: Effect of Holding Time 191
- 7-10. Cast 2.25Cr-1.0Mo Steel, Centrifugally Cast: Fatigue Properties at 540 °C (1000 °F) 192
- 7-11. H11 Steel: Crack Growth Rate in Water and in Water Vapor 193
- 7-12. 9.0Cr-1.0Mo Steel: Creep-Fatigue Characteristics 194
- 7-13. 9.0Cr-1.0Mo Modified Steel: Stress Amplitudes Developed in Cycling 195
- 7-14. 9.0Cr-1.0Mo Modified Steel: Effect of Deformation 196

SECTION 8: Stainless Steels 197

- 8-1. Type 301 Stainless Steel: Scatter Band for Fatigue Crack Growth Rates 197
- 8-2. Type 301 Stainless Steel: Effects of Temperature and Environment on Fatigue Crack Growth Rate 198
- 8-3. Type 304 Stainless Steel: Effect of Temperature on Frequency-Modified Strains 199
- 8-4. Type 304 Stainless Steel: Fatigue Crack Growth Rate—Annealed and Cold Worked 200
- 8-5. Type 304 Stainless Steel: Effect of Humidity on Fatigue Crack Growth Rate 201
- 8-6. Type 304 Stainless Steel: Effect of Aging on Fatigue Crack Growth Rate 202
- 8-7. Type 304 Stainless Steel: Effect of Temperature on Fatigue Crack Growth Rate 203
- 8-8. Type 304 Stainless Steel: Damage Relation at 650 °C (1200 °F) 204

Contents

- 8-9. Type 304 Stainless Steel: Fatigue Crack Growth Rate at Room and Subzero Temperatures 205
- 8-10. Types 304 and 304L Stainless Steel: Effect of Cryogenic Temperatures on Fatigue Crack Growth Rate 206
- 8-11. Type 304 Stainless Steel: Fatigue Crack Growth Rate in Air With Variation in Waveforms 207
- 8-12. Type 304 Stainless Steel: Effect of Hold Time on Cycles to Failure 208
- 8-13. Type 304 Stainless Steel: Effect of Hold Time and Continuous Cycling on Fatigue Crack Growth Rates 209
- 8-14. Type 304 Stainless Steel: Effect of Cyclic Frequency on Fatigue Crack Growth Rate 210
- 8-15. Type 304 Stainless Steel: Effect of Frequency on Fatigue Crack Growth Behavior 211
- 8-16. Type 304 Stainless Steel Welded With Type 308: Fatigue Crack Growth Rates 212
- 8-17. Types 304 and 310 Stainless Steel: Effect of Direction on $S-N$ 213
- 8-18. Types 304, 316, 321, and 348 Stainless Steel: Effects of Temperature on Fatigue Crack Growth Rates 214
- 8-19. Type 309S Stainless Steel: Effect of Grain Size on Fatigue Crack Growth Rate 215
- 8-20. Type 310S Stainless Steel: Effect of Temperature on Fatigue Crack Growth Rate 216
- 8-21. Type 316 Stainless Steel: Growth Rate of Fatigue Cracks in Weldments 217
- 8-22. Type 316 Stainless Steel: Fatigue Crack Growth Rates—Aged vs Unaged 218
- 8-23. Type 316 Stainless Steel: Fatigue Crack Growth Rates—Effect of Aging 219
- 8-24. Type 316 Stainless Steel: Effect of Temperature on Fatigue Crack Growth Rate 220
- 8-25. Type 316 Stainless Steel: Effect of Cyclic Frequency on Fatigue Crack Growth Rate 221
- 8-26. Type 316 Stainless Steel: Fatigue Crack Growth Rate in the Annealed Condition 222
- 8-27. Type 316 Stainless Steel: Effect of Environment (Sodium, Helium, and Air) on Cycles to Failure 223
- 8-28. Types 316 and 321 Stainless Steel: Effects of Gaseous Environments on Fatigue Crack Growth Rates 224
- 8-29. Type 321 Stainless Steel: Effect of Hold Time on Fatigue Crack Growth Rates 225
- 8-30. Type 403 Stainless Steel: Effect of Environment on Fatigue Crack Growth Rate 226
- 8-31. Type 403 Modified Stainless Steel: Scatter of Fatigue Crack Growth Rates 227
- 8-32. Type 422 Stainless Steel: Fatigue Crack Growth Rates in Precracked Specimens 228
- 8-33. Type 422 Stainless Steel: Fatigue Strength—Longitudinal vs Transverse 229
- 8-34. Type 422 Stainless Steel: Effect of Temperature on Fatigue Strength 230
- 8-35. Type 422 Stainless Steel: Effects of Delta Ferrite on Fatigue Strength 231
- 8-36. 17-4 PH Stainless Steel: Fatigue Crack Growth Rates in Air vs Salt Solution 232
- 8-37. 15-5 PH Stainless Steel: Fatigue Crack Growth Rates in Air vs Salt Solution 233
- 8-38. PH 13-8 Mo Stainless Steel: Fatigue Crack Growth Rates at Room Temperature 234
- 8-39. PH 13-8 Mo Stainless Steel: Fatigue Crack Growth Rates in Air and Sump Tank Water 235
- 8-40. PH 13-8 Mo Stainless Steel: Fatigue Crack Growth Rates at Subzero Temperatures 236
- 8-41. PH 13-8 Mo Stainless Steel: Constant-Life Fatigue Diagram 237
- 8-42. Types 600 and 329 Stainless Steel: $S-N$ Curves for Two Processing Methods 238
- 8-43. Grade 21-6-9 Stainless Steel: Effect of Temperature on Fatigue Crack Growth Rates 239
- 8-44. Kromarc 58 Stainless Steel: Effect of Cryogenic Temperatures on Weldments 240
- 8-45. Pyromet 538 Stainless Steel: Effects of Welding Methods on Fatigue Crack Growth Rates 241
- 8-46. Duplex Stainless Steel KCR 171: Corrosion Fatigue 242

Contents

SECTION 9: Maraging Steels 243

- 9-1. Grades 200, 250, and 300 Maraging Steel: *S-N* Curves for Smooth and Notched Specimens 243
- 9-2. Grade 300 Maraging Steel: Fatigue Life in Terms of Total Strain 244

SECTION 10: Cast Irons 245

- 10-1. Fatigue of Cast Irons as a Function of Structure-Sensitive Parameters 245
- 10-2. Gray Iron: Fatigue Life, and Fatigue Limit as a Function of Temperature 246
- 10-3. Gray Iron: *S-N* Curves for Unalloyed vs Alloyed 247
- 10-4. Gray Iron: Effect of Environment 248
- 10-5. Class 30 Gray Iron: Modified Goodman Diagram for Class 30 249
- 10-6. Class 30 Gray Iron: Fatigue Crack Growth Rates for Class 30 250
- 10-7. Gray Irons: Torsional Fatigue for Various Tensile Strength Values 251
- 10-8. Gray Irons: Torsional Fatigue Data for Five Different Compositions 252
- 10-9. Gray Irons: Thermal Fatigue—Effect of Aluminum Additions 253
- 10-10. Gray Irons: Thermal Fatigue—Effect of Chromium and Molybdenum Additions 254
- 10-11. Gray Irons: Thermal Fatigue—Room Temperature and 540 °C (1000 °F) 255
- 10-12. Gray Irons: Thermal Fatigue Properties—Comparisons With Ductile Cast Iron and Carbon Steel 256
- 10-13. Cast Irons: Thermal Fatigue Properties for Six Grades 257
- 10-14. Ductile Iron: Effect of Microstructure on Endurance Ratio—Tensile Strength Relationship 258
- 10-15. Ductile Iron: Effect of Microstructure on Endurance Ratio—Tensile Strength Relationship 259
- 10-16. Ductile Iron: *S-N* Curves for Ferritic and Pearlitic Grades, Using V-Notched Specimens 260
- 10-17. Ductile Iron: *S-N* Curves for Ferritic and Pearlitic Grades, Using Unnotched Specimens 261
- 10-18. Ductile Iron: Fatigue Diagrams for Bending Stresses and Tension-Compression Stresses 262
- 10-19. Ductile Iron: Effect of Surface Conditions—As-Cast vs Polished Surface 263
- 10-20. Ductile Iron: Fatigue Limit in Rotary Bending as Related to Hardness 264
- 10-21. Ductile Iron: Effect of Rolling on Fatigue Characteristics 265
- 10-22. Ductile Iron: Effect of Notches on a 65,800-psi-Tensile-Strength Grade 266
- 10-23. Ductile Iron: Fatigue Crack Growth Rate Compared With That of Steel 267
- 10-24. Malleable Iron: *S-N* Curve Comparisons of Four Grades 268
- 10-25. Pearlitic Malleable Iron: Effect of Surface Conditions on *S-N* Curves 269
- 10-26. Pearlitic Malleable Iron: Effect of Nitriding 270
- 10-27. Ferritic Malleable Iron: Effect of Notch Radius and Depth 271

SECTION 11: Heat-Resisting Alloys 272

- 11-1. A286: Effect of Environment 272
- 11-2. A286: Effect of Frequency on Life at 593 °C (1095 °F) 273
- 11-3. A286: Fatigue Crack Growth Rates at Room and Elevated Temperatures 274
- 11-4. Astroloy: *S-N* Curves for Powder vs Conventional Forgings 275
- 11-5. Astroloy: Powder vs Conventional Forgings Tested at 705 °C (1300 °F) 276
- 11-6. FSX-430: Effect of Grain Size on Cycles to Cracking 277
- 11-7. FSX-430: Effect of Grain Size on Fatigue Crack Propagation Rate 278
- 11-8. HS-31: Effect of Testing Temperature 279
- 11-9. IN 738 LC Casting Alloy: Standard vs HIP'd Material 280
- 11-10. IN 738 LC: Effect of Grain Size on Cycles to Failure 281
- 11-11. IN 738 LC: Effect of Grain Size on Cycles to Cracking 282
- 11-12. IN 738 LC: Effect of Grain Size on Fatigue Crack Propagation Rate 283
- 11-13. IN 738 LC: Fatigue Crack Growth Rate at 850 °C (1560 °F) 284
- 11-14. Inconel 550: Axial Tensile Fatigue Properties in Air and Vacuum at 1090 K 284

11-15. Inconel 625: Effect of Temperature on Cycles to Failure	286
11-16. Inconel 706: Effect of Temperature on Fatigue Crack Growth Rate	287
11-17. Inconel "713C": Effect of Elevated Temperatures on Fatigue Characteristics	288
11-18. Inconel "713C" and As-Cast HS-31: Comparison of Two Alloys for Number of Cycles in Thermal Fatigue to Initiate Cracks	289
11-19. Inconel 718: Effect of Frequency on Fatigue Crack Propagation Rate	290
11-20. Inconel 718: Relationship of Fatigue Crack Propagation Rate With Stress Intensity	291
11-21. Inconel 718: Relationship of Fatigue Crack Growth Rate With Load/Time Waveforms	292
11-22. Inconel 718: Fatigue Crack Growth Rate in Air vs Helium	293
11-23. Inconel 718: Effect of Environment on Fatigue Crack Growth Rate	294
11-24. Inconel 718: Fatigue Crack Growth Rate in Air Plus 5% Sulfur Dioxide	295
11-25. Inconel 718: Fatigue Crack Growth Rate in Air at Room Temperature	296
11-26. Inconel 718: Fatigue Crack Growth Rate in Air at 316 °C (600 °F)	297
11-27. Inconel 718: Fatigue Crack Growth Rate in Air at 427 °C (800 °F)	298
11-28. Inconel 718: Fatigue Crack Growth Rate in Air at 538 °C (1000 °F)	299
11-29. Inconel 718: Fatigue Crack Growth Rate in Air at 649 °C (1200 °F)	300
11-30. Inconel 718: Fatigue Crack Growth Rates at Cryogenic Temperatures	301
11-31. Inconel 718 and X-750: Fatigue Crack Growth Rates at Cryogenic Temperatures	302
11-32. Inconel X-750: Effect of Temperature on Fatigue Crack Growth Rates	303
11-33. Jethete M152: Interrelationship of Tempering Treatment, Alloy Class, and Testing Temperature With Fatigue Characteristics	304
11-34. Lapelloy: Interrelationship of Hardness and Strength With Fatigue Characteristics	305
11-35. MAR-M200: Effect of Atmosphere on Cycles to Failure	306
11-36. MAR-M509: Correlation of Initial Crack Propagation and Dendrite Arm Spacing	307
11-37. MAR-M509: Correlation Between Number of Cycles Required to Initiate a Crack and Dendrite Arm Spacing	308
11-38. MERL 76, P/M: Axial Low-Cycle Fatigue Life of As-HIP'd Alloy at 540 °C (1000 °F)	309
11-39. Nickel-Base Alloys: Effect of Solidification Conditions on Cycles to Onset of Cracking	310
11-40. René 95 (As-HIP): Cyclic Crack Growth Behavior Under Continuous and Hold-Time Conditions	311
11-41. René 95: Effect of Temperature on Fatigue Crack Growth Rate	312
11-42. S-816: Effect of Notches on Cycles to Failure at 900 °C (1650 °F)	313
11-43. Udimet 700: Fatigue Crack Growth Rates at 850 °C (1560 °F)	314
11-44. U-700 and MAR-M200: Comparison of Fatigue Properties	315
11-45. Waspaloy: Stress-Response Curves	316
11-46. X-40: Effect of Grain Size and Temperature on Fatigue Characteristics	317
11-47. Cast Heat-Resisting Alloys: Ranking for Resistance to Thermal Fatigue	318

SECTION 12: Aluminum Alloys 319

12-1. Corrosion-Fatigue Properties of Aluminum Alloys Compared With Those of Other Alloys	319
12-2. Comparisons of Aluminum Alloys With Magnesium and Steel: Tensile Strength vs Endurance Limit	320
12-3. Aluminum Alloys (General): Yield Strength vs Fatigue Strength	321
12-4. Comparison of Aluminum Alloy Grades for Crack Propagation Rate	322
12-5. Alloy 1100: Relationship of Fatigue Cycles and Hardness for H0 and H14 Tempers	323
12-6. Alloy 1100: Interrelationship of Fatigue Cycles, Acoustic Harmonic Generation and Hardness	324
12-7. Alloy 2014-T6: Notched vs Unnotched Specimens; Effect on Cycles to Failure	325
12-8. Alloy 2024-T3: Effect of Air vs Vacuum Environments on Cycles to Failure	326
12-9. Alloy 2024-T4 Alclad Sheet: Effect of Bending on Cycles to Failure	327

Contents

- 12-10. Alloy 2024-T4: High-Cycle vs Low-Cycle Fatigue 328
- 12-11. Alloy 2024-T4: Relationship of Stress and Fatigue Cycles 329
- 12-12. Alloy 2024-T4: Dependence of the Average Rocking Curve Halfwidth $\bar{\beta}$ on Distance From the Surface 330
- 12-13. Alloys 2024 and X2024: Effect of Alloy Purity on Cycles to Failure 331
- 12-14. Alloys 2024 and 2124: Relationship of Particle Size and Fatigue Characteristics 332
- 12-15. Alloys 2024-T4 and 2124-T4: Comparison of Resistance to Fatigue Crack Initiation 333
- 12-16. Alloys 2024-T3 and 7075-T6: Summary of Fatigue Crack Growth Rates 334
- 12-17. Alloys 2024-T4 and 7075-T6: Effect of Product Form and Notches 335
- 12-18. Alloys 2024-T351 and 7075-T73XXX: Comparison of P/M Extrusions and Rod 336
- 12-19. Alloy 2048-T851: Longitudinal vs Transverse for Axial Fatigue 337
- 12-20. Alloy 2048-T851: Notched vs Unnotched Specimens at Room and Elevated Temperatures 338
- 12-21. Alloy 2048-T851: Fatigue Crack Propagation Rates in LT and TL Orientations 339
- 12-22. Alloy 2048-T851: Modified Goodman Diagram for Axial Fatigue 340
- 12-23. Alloy 2219-T851: Dependence of Relaxation Behavior on the Cyclic Hardening Parameter 341
- 12-24. Alloy 2219-T851: Effect of Strain Amplitude on the Relaxation of Residual Surface Stress With Fatigue 342
- 12-25. Alloy 2219-T851: Relationship of Fatigue Cycles to Different Depth Distributions of Surface Stress 343
- 12-26. Alloy 2219-T851: Probability of Fatigue Failure 344
- 12-27. Alloys 3003-O, 5154-H34 and 6061-T6: Effect of Alloy on Fatigue Characteristics of Weldments 345
- 12-28. Alloy 5083-O Plate: Effect of Orientation on Fatigue Crack Growth Rates 346
- 12-29. Alloy 5083-O Plate: Effect of Temperature and Humidity on Fatigue Crack Growth Rates 347
- 12-30. Alloys 5086-H34, 5086-H36, 6061-T6, 7075-T73 and 2024-T3: Comparative Resistance to Axial-Stress Fatigue 348
- 12-31. Alloys 5083-O/5183: Fatigue Life Predictions and Experimental Data Results for Double V-Butt Welds 349
- 12-32. Alloys 5083-O/5183: Predicted Effect of Stress Relief and Stress Ratio on Fatigue Life of Butt Welds 350
- 12-33. 7XXX Alloys: Cyclic Strain vs Crack Initiation Life 351
- 12-34. Alloy 7050: Influence of Alloy Composition and Dispersoid Effect on Mean Calculated Fatigue Life 352
- 12-35. Alloy 7050: Effect of Grain Shape on Cycles to Failure 353
- 12-36. Alloy 7075 (TMP, T6 and T651): Effect of Thermomechanical Processing on Cycles to Failure 354
- 12-37. Alloys 7075 and 7475: Effect of Inclusion Density on Cycles to Failure 355
- 12-38. Alloy 7075: Effect of TMT on Cycles to Failure 356
- 12-39. Alloys 7075 and 7050: Relative Ranking for Constant Amplitude and Periodic Overload 357
- 12-40. Alloy 7075: Effect of Environment and Mode of Loading 358
- 12-41. Alloy 7075-T6: Effects of Corrosion and Pre-Corrosion 359
- 12-42. Alloy 7075-T73: Effect of a 3.5% NaCl Environment on Cycles to Failure 360
- 12-43. Alloy 7075: Effect of Cathodic Polarization on Fatigue Behavior 361
- 12-44. Alloy 7075-T6: Effect of Surface Treatments and Notch Designs on Number of Cycles to Failure 362
- 12-45. Alloy 7075-T6: Effect of R-Ratio on Fatigue Crack Propagation 364
- 12-46. Alloy 7075: Effect of Predeformation on Fatigue Crack Propagation Rates 365
- 12-47. Alloys 7075 and 2024-T3: Comparative Fatigue Crack Growth Rates for Two Alloys in Varying Humidity 366
- 12-48. Alloy 7075-T651: Fatigue Life as Related to Harmonic Generation 367
- 12-49. Alloys 7075-T6 and 7475-T73: Effect of Laser-Shock Treatment on Fatigue Properties 368
- 12-50. Alloy 7075-T6: Effect of Laser-Shock Treatment on Hi-Lok Joints 369

- 12-51. Alloy 7075 (High Purity): Effect of Iron and Silicon on Cycles to Failure 370
- 12-52. Alloy X-7075: Effect of Grain Size on Cycles to Failure 371
- 12-53. Alloy X-7075: Effect of Grain Size on Stress-Life Behavior 372
- 12-54. Alloy X-7075: Effect of Environment; Air vs Vacuum 373
- 12-55. Alloy X-7075: Effect of Environment on Two Different Grain Sizes 374
- 12-56. Alloy X-7075: Effect of Grain-Boundary Ledges on Cycles to Failure 375
- 12-57. Alloys X-7075 and 7075: Effects of Chromium Inclusions on Fatigue Crack Propagation 376
- 12-58. Alloy 7475-T6: *S-N* Diagram for a Superplastic Fine-Grain Alloy 377
- 12-59. Alloy 7475: Effect of Alignment of Grain Boundaries on Cycles to Failure 378
- 12-60. Alloy 7475-T6: Superplastic vs Nonsuperplastic, as Related to Fatigue Crack Growth 379
- 12-61. Alloys X-7075 and 7075: Effect of Chromium-Containing Inclusions on Cycles to Failure 380
- 12-62. Aluminum Forging Alloys: Stress Amplitude vs Reversals to Failure 381
- 12-63. Al-5Mg-0.5Ag: Effect of Condition on Fatigue Characteristics 382
- 12-64. Al-Zn-Mg and Al-Zn-Mg-Zr: Effect of Grain Size on Strain-Life Behavior 383
- 12-65. Al-Zn-Mg: Strain-Life Curves of a Large-Grained Alloy 384
- 12-66. Aluminum With a Copper Overlay: Stress Amplitude vs Cycles to Failure 385
- 12-67. P/M Alloys 7090 and 7091 vs Extruded 2024 386
- 12-68. P/M Alloys 7090 and 7091 vs I/M 7050 and 7075 Products 387
- 12-69. P/M Aluminum Alloys: Typical Fatigue Behavior 388
- 12-70. P/M Aluminum Alloys: Comparison With Specimens Made by Ingot Metallurgy 389
- 12-71. P/M Aluminum Alloys: Comparison With Forged 7175 for Cycles to Failure 390
- 12-72. Various Aluminum Alloys: Comparison of Grades for Corrosion-Fatigue Crack Growth Rates; Air vs Salt Water 391
- 12-73. Various Aluminum Alloys: Comparison of Grades for Corrosion-Fatigue Crack Growth Rates in Salt Water 392
- 12-74. Various Aluminum Alloys: Wrought vs Cast, and Influence of Casting Method on Fatigue Life 393
- 12-75. Aluminum Casting Alloy AL-195: Interrelationship of Fatigue Properties With Degree of Porosity 394
- 12-76. Aluminum Casting Alloy LM25-T6: Squeeze Formed vs Chill Cast; Effect on Reversals to Failure 395

SECTION 13: Copper Alloys 396

- 13-1. Copper: Effect of Air and Water Vapor on Cycles to Failure 396
- 13-2. Copper: Applied Plastic-Strain Amplitude vs Fatigue Life 397
- 13-3. Copper Alloy C11000 (ETP Wire): Effect of Temperature on Fatigue Strength 398
- 13-4. Copper Alloy C26000 (Cartridge Brass): Influence of Grain Size and Cold Work on Cycles to Failure 399
- 13-5. Copper Alloy C83600 (Leaded Red Brass): *S-N* Curves; Scatter Band 400
- 13-6. Copper Alloy C86500 (Manganese Bronze): *S-N* Curves; Scatter Band 401
- 13-7. Copper Alloys C87500 and C87800 (Silicon Brasses): *S-N* Curves; Scatter Band 402
- 13-8. Copper Alloy C92200 (Navy "M" Bronze): *S-N* Curves; Scatter Band 403
- 13-9. Copper Alloy C93700 (High-Leaded Tin Bronze): *S-N* Curves; Scatter Band 404
- 13-10. Copper Alloy No. 192: Effect of Salt Spray on Tubes 405
- 13-11. Copper Alloy 955: Goodman-Type Diagram 406

SECTION 14: Magnesium Alloys 407

- 14-1. Magnesium Casting Alloy QE22A-T6: Effects of Notches and Testing Temperature 407
- 14-2. Magnesium Casting Alloy QH21A-T6: *S-N* Curves; Effects of Notches and Testing Temperature 408
- 14-3. Mg-Al-Zn Casting Alloys: Effects of Surface Conditions on Fatigue Properties 409

Contents

SECTION 15: Molybdenum 410

- 15-1. Molybdenum: Fatigue Limit Ratio vs Temperature 410

SECTION 16: Tin Alloys 411

- 16-1. Tin-Lead Soldering Alloy: *S-N* Data for Soldered Joints 411
16-2. Babbitt: Variation of Bearing Life With Babbitt Thickness 412
16-3. SAE12 Bearing Alloy: Effect of Temperature on Fatigue Life 413

SECTION 17: Titanium and Titanium Alloys 414

- 17-1. Unalloyed Titanium, Grade 3: *S-N* Curves for Annealed vs Cold Rolled 414
17-2. Unalloyed Titanium, Grade 4: *S-N* Curves for Three Testing Temperatures 415
17-3. Ti-24V and Ti-32V: Stress Amplitude vs Cycles to Failure 416
17-4. Ti-5Al-2.5Sn: Effects of Notches and Types of Surface Finish 417
17-5. Ti-5Al-2.5Sn and Ti-6Al-4V: Fatigue Crack Growth Rates 418
17-6. Ti-6Al-6V-2Sn: Effects of Machining and Grinding 419
17-7. Ti-6Al-6V-2Sn (HIP): *S-N* Curves for Titanium Alloy Powder Consolidated by HIP 420
17-8. Ti-6Al-6V-2Sn (HIP): *S-N* Curves for Annealed Plate vs HIP 421
17-9. Ti-6Al-2Sn-4Zr-2Mo: Bar Chart Presentation on Effects of Machining and Grinding 422
17-10. Ti-6Al-2Sn-4Zr-2Mo: Constant-Life Fatigue Diagram 423
17-11. Ti-6Al-2Sn-4Zr-6Mo: Low-Cycle Axial Fatigue Curves 424
17-12. Ti-8Mo-2Fe-3Al: *S-N* Curves; Solution Treated and Aged Condition 425
17-13. Ti-10V-2Fe-3Al: *S-N* Curves; Notched vs Unnotched Specimens in Axial Fatigue 426
17-14. Ti-10V-2Fe-3Al and Ti-6Al-4V: Comparison of Fatigue Crack Growth Rates 427
17-15. Ti-10V-2Fe-3Al: *S-N* Curve; Notched Bar Fatigue Life for a Series of Forgings Compared With Ti-6Al-4V Plate 428
17-16. Ti-13V-11Cr-3Al: Constant-Life Fatigue Diagrams 429
17-17. Ti-6Al-4V: Effect of Condition and Notches on Fatigue Characteristics 430
17-18. Ti-6Al-4V: Effect of Direction on Endurance 431
17-19. Ti-6Al-4V: Effect of Isothermally Rolled vs Extruded Material on Cycles to Failure 432
17-20. Ti-6Al-4V: Comparison of Wrought vs Isostatically Pressed Material for Cycles to Failure 433
17-21. Ti-6Al-4V: Effect of Fretting and Temperature on Cycles to Failure 434
17-22. Ti-6Al-4V (Beta Rolled): Effect of Finishing Operations on Cycles to Failure 435
17-23. Ti-6Al-4V: Effect of Yield Strength on Stress-Life Behavior 436
17-24. Ti-6Al-4V: Effect of Stress Relief on Cycles to Failure 437
17-25. Ti-6Al-4V: Interrelationship of Machining Practice and Cutting Fluids on Cycles to Failure 438
17-26. Ti-6Al-4V: Relative Effects of Machining and Grinding Operations on Endurance Limit 439
17-27. Ti-6Al-4V: Effects of Various Metal Removal Operations on Endurance Limit 440
17-28. Ti-6Al-4V: Effect of Texture on Fatigue Strength 441
17-29. Ti-6Al-4V: Effect of Complex Texture on Cycles to Failure 442
17-30. Ti-6Al-4V: Effect of Texture and Environment on Cycles to Failure 443
17-31. Ti-6Al-4V: Fatigue Crack Growth Rates 444
17-32. Ti-6Al-4V: Fatigue Crack Growth Rates for ISR Tee, and Extrusions 445
17-33. Ti-6Al-4V: Fatigue Crack Growth Rates 446
17-34. Ti-6Al-4V: Effect of Final Cooling on Fatigue Crack Growth Rates 447
17-35. Ti-6Al-4V: Effect of Dwell Time on Fatigue Crack Growth Rates 448
17-36. Ti-6Al-4V: Fatigue Crack Growth Data 449
17-37. Ti-6Al-4V P/M: Comparison of HIP'd Material With Alpha-Beta Forgings for Cycles to Failure 450

- 17-38. Ti-6Al-4V P/M: Comparisons of HIP'd Material With Annealed Plate for Cycles to Failure 451
- 17-39. Ti-6Al-4V P/M: Effect of Powder Mesh Size on Fatigue Properties 452
- 17-40. Ti-6Al-4V P/M: Comparison of Blended Elemental, Prealloyed and Wrought Material for Effect on Cycles to Failure 453
- 17-41. Ti-6Al-4V: P/M Compacts vs I/M Specimens: Cycles to Failure 454
- 17-42. Ti-6Al-4V: Comparison of Specimens Processed by Various Fabrication Processes for Cycles to Failure 455
- 17-43. Ti-6Al-4V: Comparison of Fatigue Crack Growth Rate, P/M vs I/M 456
- 17-44. Ti-6Al-4V: Base Metal vs SSEB-Welded Material for Cycles to Failure 457
- 17-45. Ti-6Al-4V: Base Metal vs SSEB-Welded Material for Cycles to Failure 458
- 17-46. Ti-6Al-4V EB Weldments: Base Metal Compared With Flawless Weldments 459
- 17-47. Ti-6Al-4V EB Weldments: Effects of Porosity on Cycles to Failure 460
- 17-48. Ti-6Al-4V Gas Metal-Arc Weldments: Effects of Porosity on Cycles to Failure 461
- 17-49. Ti-6Al-4V: Unwelded vs Electron Beam Welded Material for Cycles to Failure 462
- 17-50. Ti-6Al-4V: *S-N* Diagram for Laser-Welded Sheet 463
- 17-51. Ti-6Al-4V (Cast): *S-N* Diagram for Notched Specimens 464

SECTION 18: Zirconium 465

- 18-1. Zirconium 702: Effects of Notches and Testing Temperature on Cycles to Failure 465

SECTION 19: Steel Castings 466

(For other data on steel castings see Sections 3, 4 and 5, on carbon and alloy steels.)

- 19-1. Steel Castings (General): Effect of Design and Welding Practice on Fatigue Characteristics 466
- 19-2. Steel Castings (General): Effects of Discontinuities on Fatigue Characteristics 467

SECTION 20: Closed-Die Forgings 468

(See also under specific grades of alloys.)

- 20-1. Closed-Die Steel Forgings: Effect of Surface Condition on Fatigue Limit 468

SECTION 21: Powder Metallurgy Parts 469

(See also under specific alloys.)

- 21-1. P/M: Relation of Density to Fatigue Limit and Fatigue Ratio 469
- 21-2. P/M: Relation of Fatigue Limit to Tensile Strength for Sintered Steels 470
- 21-3. P/M (Nickel Steels): As-Sintered vs Quenched and Tempered for Cycles to Failure 471
- 21-4. P/M (Nickel Steels): Relation Between Fatigue Limit and Tensile Strength for Sintered Steels 472
- 21-5. P/M (Nickel Steels): Effect of Notches on Cycles to Failure for the As-Sintered Condition 473
- 21-6. P/M (Nickel Steels): Effect of Notches on Cycles to Failure for the Quenched and Tempered Condition 474
- 21-7. P/M (Low-Carbon, 1-5%Cu): Effects of Notches and Nitriding on Cycles to Failure 475
- 21-8. P/M (Sintered Iron, Low-Carbon, No Copper): Effect of Density and Nitriding on Cycles to Failure 476
- 21-9. P/M: Effect of Nitriding on Ductile Iron and Sintered Iron (3%Cu) for Cycles to Failure 477

SECTION 22: Composites 478

- 22-1. Brass/Mild Steel Composite: Comparison of Brass-Clad Mild Steel With Brass and Mild Steel for Cycles to Failure 478
- 22-2. Stainless Steel/Mild Steel Composite: Comparison of Stainless-Clad Mild Steel With Stainless Steel and Mild Steel for Cycles to Failure 479

Contents

SECTION 23: Effects of Surface Treatments 480

- 23-1. Carbon and Alloy Steels (Seven Grades): Effects of Nitrocarburizing on Fatigue Strength 480
- 23-2. Carbon and Alloy Steels (Seven Grades): Effects of Tufftriding on Fatigue Characteristics 481
- 23-3. Carbon and Alloy Steels (Six Grades): Effects of Nitriding on Fatigue Strength 482
- 23-4. Carbon-Manganese Steel: Effects of Nickel Coating on Fatigue Strength 483

SECTION 24: Test Results for Component Parts 484

- 24-1. Coil Springs, Music Wire (Six Sizes): Data Presented by Means of a Goodman Diagram 484
- 24-2. Coil Springs: *S-N* Data for Oil-Tempered and Music Wire Grades 485
- 24-3. Coil Springs: Effects of Shot Peening on Cycles to Failure 486
- 24-4. Coil Springs, 8650 and 8660 Steels: Relation of Design Stresses and Probability of Failure 487
- 24-5. Coil Springs, HSLA Steels: Effects of Corrosion on Cycles to Failure 488
- 24-6. Leaf Springs, 5160 Steel: Maximum Applied Stress vs Cycles to Failure 489
- 24-7. Front Suspension Torsion Bar Springs, 5160H Steel: Distribution of Fatigue Results for Simulated Service Testing 490
- 24-8. Gears, Carburized Low-Carbon Steel: Relation of Life Factor to Required Life 491
- 24-9. Gears, Carburized Low-Carbon Steel: Bending Stress vs Cycles to Failure 492
- 24-10. Gears, Carburized Low-Carbon Steel: Effect of Shot Peening on Cycles to Failure 493
- 24-11. Gears, Carburized Low-Carbon Steel: Probability-Stress-Life Design Curves 494
- 24-12. Gears, 8620H Carburized: Bending or Contact Stress vs Cycles to Fracture or Pitting 495
- 24-13. Gears, 8620H Carburized: A Weibull Analysis of Bending Fatigue Data 496
- 24-14. Gears, 8620H Carburized: *T-N* Curves for Six-Pinion, Four-Square Tests 497
- 24-15. Hypoid Gears, 8620H Carburized: Minimum Confidence Level; Stress vs Cycles to Rupture 498
- 24-16. Hypoid, Zerol and Spiral Bevel Gears, 8620H Carburized: *S-N* Scatter Band and Minimum Confidence Level 499
- 24-17. Spiral Bevel and Zerol Bevel Gears, 8620H Carburized: *S-N* Scatter Band and Minimum Confidence Level 500
- 24-18. Gears, 8620H Case Hardened: Relation of Life Factor to Cycles to Rupture 501
- 24-19. Bevel Gears, Low-Carbon Steel Case Hardened: Relation of Life Factor to Cycles to Rupture for Various Confidence Levels 502
- 24-20. Gears, AMS 6265: *S-N* Data for Cut vs Forged 503
- 24-21. Spur Gears, 8620H: *S-N* Data for Cut vs Forged 504
- 24-22. Gears and Pinions: P/M 4600V vs 4615; Weibull Distributions 505
- 24-23. Gears and Pinions: P/M Grades 4600V and 2000 vs 4615; Percent Failure vs Time 506
- 24-24. Gear Steel AMS 6265: Parent Metal vs Electron Beam Welded 507
- 24-25. Gears, 42 CrMo4 (German Specification): *S-N* Curves for Various Profiles 508
- 24-26. Gears, 42 CrMo4 (German Specification): Endurance Test Results in the Weibull Distribution Diagram 509
- 24-27. Bolts, 1040 and 4037 Steels: Maximum Bending Stress vs Number of Stress Cycles 510
- 24-28. Bolts: *S-N* Data for Roll Threading Before and After Heat Treatment 511
- 24-29. Power Shafts, AMS 6382 and AMS 6260: Electron Beam Welded vs Silver Brazed Joints 512
- 24-30. Axle Shafts, 1046, 1541 and 50B54 Steels: *S-N* Data for Induction Hardening vs Through Hardening 513
- 24-31. Steel Rollers, 8620H Carburized: Effects of Carburizing Temperature and Quenching Practice on Surface Fatigue 514

- 24-32. Steel Rollers, 8620H Carburized: Effects of Carburizing Temperature and Quenching Practice on Surface Fatigue 515
- 24-33. Linkage Arm, Cast Low-Carbon Steel: Starting Crack Size vs Cycles to Failure 516
- 24-34. Notched Links, Hot Rolled Low-Carbon Steel: S-N Data for Component Test Model 517
- 24-35. Fuselage Brace, Ti-6Al-6V-2Sn: Fatigue Endurance of HIP-Consolidated Powder 518